

Communication

Pulse mode of operation – A new booster of TEG, improving power up to X2.7 – to better fit IoT requirements

Maciej Haras^{a,b,c}, Michał Markiewicz^{b,e}, Stéphane Monfray^f, Thomas Skotnicki^{a,b,c,d,*}^a CENTERA Laboratories, Institute of High-Pressure Physics, Polish Academy of Sciences, Warsaw, 01-142, Poland^b CEZAMAT PW Ltd., ul. Poleczki 19, 02-822, Warsaw, Poland^c Warsaw University of Technology, Centre for Advanced Materials and Technologies CEZAMAT, ul. Poleczki 19, 02-822, Warsaw, Poland^d Warsaw University of Technology, Faculty of Electronics and Information Technology, Institute of Microelectronics and Optoelectronics, ul. Koszykowa 75, 00-662, Warsaw, Poland^e Jagiellonian University, Faculty of Mathematics and Computer Science, ul. Łojasiewicza 6, 30-348, Cracow, Poland^f STMicroelectronics, 850 Rue Jean Monnet, 38926, Crolles, France

ARTICLE INFO

Keywords:

Internet of things (IoT)
Heat energy harvesting
Thermoelectricity
Power boost
Pulse operation
Bimetal

ABSTRACT

Internet of Things (IoT) is becoming the new driver for semiconductor industry and the largest electronic market ever seen. The number of IoT nodes is already many times larger than the human population and is continuously growing. It is thus mandatory that IoT nodes become self-supplying with energy harvested from environment since periodic exchange of batteries in such a huge number of units (often located in inaccessible places e.g. industrial environment or elements of constructions) is impractical and soon will be simply impossible. Photovoltaic generators may easily harvest energy where light is available, but the IoT nodes often work in dark, hidden locations where the only available energy sources are heat losses. There, ThermoElectric Generators (TEGs) could be the best candidate, if not that if we speak of exploiting heat losses it often means very low temperature differences. This means conditions where TEGs power production drops down dramatically. In this paper we put forward a new idea of TEG's pulse operation that boosts the power production up to X2.7. This extends the domain of applicability of TEGs to lower temperature differences, where conventional TEGs are out of the game. Next, we show that the improvement X2.7 maintains also at larger temperature differences that presents obvious advantages.

1. Introduction

Semiconductor industry is currently under huge influence of the Internet of Things (IoT) [1,2] technologies. Emerging market of IoT (see black line in Fig. 1) outnumbers ~X7 human population [3]. Additionally, the aforementioned quantity growth is accompanied by the miniaturization and densification trend that continues over several decades [4–6]! In light of omnipresence, quantity and availability of electronic devices, supplying them becomes a difficult challenge, even though their power consumption per operation has been largely reduced over past years [7,8]. The challenge is not only with battery lifetime but also with renewing (exchanging) them in trillions of places. Being aware that the quantity of Things is ~X7 higher than human population and considering that usually IoT nodes are installed in harsh and difficult to reach locations, maintaining them is difficult. Despite that the energy needed for

IoT node to operate is very small (~100 μJ/cycle [9]), each Thing in IoT system has to be supplied. Grid supply requires wiring each element in the system making it costly, unreliable and difficult to modify. Battery-fed sensors are also problematic in the context of their quantity, portability, working environment and installation points, making maintenance more-and-more time consuming and expensive, not forgetting about bad influence of used batteries on the natural environment.

Therefore, searching for alternatives for battery or grid supply is an urgency. The IoT systems consist of large number of miniature sensors (Things) providing measured information (e.g. temperature, air pressure, person presence etc.) to controlling unit.

The rapid device's performance boost is not followed by the supply techniques. It can be said that the growth of the semiconductor market could be even faster and bigger when finding reliable alternatives for

* Corresponding author. CEZAMAT PW Ltd., ul. Poleczki 19, 02-822, Warsaw, Poland.

E-mail address: T.Skotnicki@cezamat.eu (T. Skotnicki).<https://doi.org/10.1016/j.nanoen.2019.104204>

Received 29 August 2019; Received in revised form 7 October 2019; Accepted 13 October 2019

Available online 16 October 2019

2211-2855/© 2019 The Authors.

Published by Elsevier Ltd.

This is an open access article under the CC BY-NC-ND license

[\(http://creativecommons.org/licenses/by-nc-nd/4.0/\)](http://creativecommons.org/licenses/by-nc-nd/4.0/).

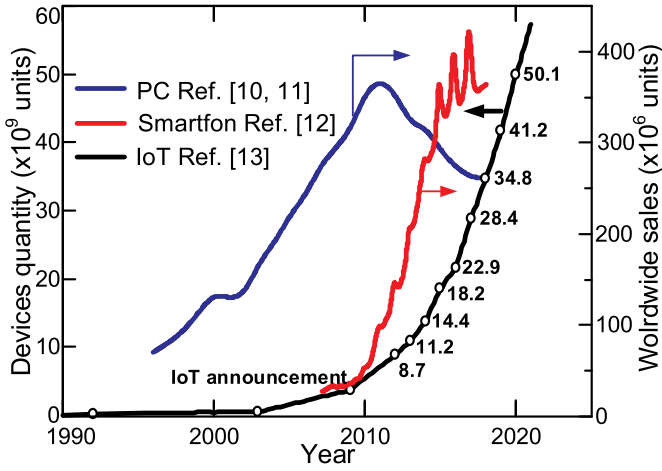


Fig. 1. Historical number of personal computers [10,11] and smartphones [12] benchmarked with the number of IoT nodes [13].

battery or wire supply. In that context the **Energy Harvesting (EH)** [14, 15] – energy production from waste or naturally provided energies (e.g. heat, light, mechanical energy - vibrations, electromagnetic radiation etc.) – could respond ideally to the current needs of the **IoT** market unlocking its further expansion.

Literature on **EH** reports huge variety of approaches to convert loss energy into useful energy. In addition to very well-known and reported methods as photovoltaic [16–19], piezoelectric [20–26], electromagnetic [27–30], radio-frequency [19,31,32] or thermoelectric [33–36], there are numerous emerging techniques including hybrid solutions e.g. pyroelectric [37–40] or triboelectric [41–47].

Despite that the thermoelectric effect (*direct, silent, vibrationless and reliable conversion of heat into electric energy*) is well known since its discovery in 1823 by T. Seebeck [48], it has never been popularized on the market and remains limited to applications such as spatial [49], medical [50–54], automotive [55–57] or sophisticated industrial [58]. The main reason for that is unattractively low **ThermoElectric Generators (TEG)** efficiencies (η , (1)) [59] resulting from thermoelectric figure-of-merit (zT , (2)) [60] at the material level:

$$\eta = \frac{T_{HOT} - T_{COLD}}{T_{HOT}} \cdot \frac{\sqrt{1 + zT} - 1}{\sqrt{1 + zT} + \frac{T_{COLD}}{T_{HOT}}} \quad (1)$$

$$zT = \frac{S^2 \cdot \sigma}{\kappa} \cdot T \quad (2)$$

Where: S is thermoelectric thermopower, and σ and κ state for electrical and thermal conductivities, respectively. **TEG** thermal operating conditions are described by the temperature drop ($\Delta T = T_{HOT} - T_{COLD}$) across the generator. Increasing η requires boosting the zT which is an extremely challenging task since S , σ , κ are interdependent. Therefore, it took more than 30 years to find a material exhibiting $zT > 1$ [35,61]. Currently, maximal zT oscillates around 2.5 for *n*-SnSe 2%Bi [62] and *p*-SnSe [63] which is still not enough to be named the “Holy Grail” [64] material that will kick-off thermoelectricity on the market (it should be *n*- and *p*-type cheap bulk materials with $zT > 3$). Knowing that zT improvement is very difficult, scientific community reported also alternative approaches to boost **TEG** performance proposing unconventional topologies: (i) lateral [36,65–71], (ii) large area pn junction [72–76] or (iii) flexible [77,78]. However, their unconventionality results more in fabrication cost reduction rather than in performance enhancement.

Closer look at the **TEG** output power (P) [79,80] reveals another possibility to improve generator’s performance by manipulation of the temperature difference. If T_{HOT} and T_{COLD} denote temperatures of the reservoirs, it does not mean that such a temperature difference ($T_{HOT} - T_{COLD}$) is seen at the extremities of the Seebeck device itself.

Actually, due to the so-called thermalization effect caused by non-zero thermal contact resistances between Seebeck device extremities and the reservoirs, the Seebeck device may be powered by a much smaller temperature difference ΔT_{eff} , see Fig. 2.

Eq. (3) indicates three possible paths to increase P : (i) rising S_{TEG} ($S_{TEG} = S_n + S_p$, sum of *n*- and *p*-pillars thermoelectric power); (ii) working under load matched condition $R_{TEG} = R_{Load}$ [53,81–85] or (iii) increasing effective ΔT_{eff} across the **TEG**.

$$P = \left[\frac{S_{TEG} \cdot \Delta T_{eff}}{R_{TEG} + R_{Load}} \right]^2 \cdot R_{Load} \quad (3)$$

where: S_{TEG} , R_{TEG} state or the total thermopower and internal resistance for a given **TEG**, R_{Load} denotes the load resistance, while ΔT_{eff} is the effective temperature difference across **TEG** itself.

Usually, the user has no influence on the S_{TEG} since this is material parameter that describes entropy per carrier or heat per carrier over temperature [86,87]. Optimization of S_{TEG} requires therefore changes in the thermoelectric material properties and structure. Working under matched load condition is widely used, but requires advanced auxiliary controlling devices able to provide **Maximal Power Point Tracking (MPPT)** [88–90]. Finally, increasing ΔT_{eff} across the **TEG** is also difficult since usually **TEGs** are subject to the externally imposed thermal conditions. In most cases T_{HOT} and T_{COLD} temperatures are user-independent. However, as we show in this paper, ΔT_{eff} and thus also P can be significantly boosted by providing a discontinuous contact between the Seebeck device and the hot source.

2. The new idea

Conventionally, the generator is permanently mounted on the heat source which results in ΔT_{eff} decrease because of T_{COLD} parasitic warming by the heat source (*thermalization process*). This is in part due to a disequilibrium between R_{thCOLD} (that is large) and R_{thHOT} (that is small). The idea is thus to modulate the thermal contact resistance R_{thHOT} by periodic raising the Seebeck device (due to discontinuity from the hot reservoir R_{thHOT} becomes large) and posing it on the hot reservoir (due to continuity with the hot reservoir R_{thHOT} becomes small) in order to hinder the thermalization process. Such a pulse way of operation leads to an increase in ΔT_{eff} , during the periods of discontinuity, and even if supposing no increase in ΔT_{eff} in the periods of continuity, the average ΔT_{eff} over long period of time will be improved. Let’s emphasize that similar but continuous effect of equalizing the thermal contact resistances (in order to hinder thermalization) is frequently used at the cold side. We mean utilization of a hot sink there, the effect of which is to reduce R_{thCOLD} . Therefore, **TEG** practical application is usually accompanied with heat-sinks mounted at the **TEG** cold side to maintain satisfactory ΔT_{eff} [54,91,92]. This is, however, undesirable since heat-sinks are costly and cumbersome.




Fig. 2. Illustration of the effective temperature drop ΔT_{eff} over the generator which depends on the thermal resistances $R_{th COLD}$ and $R_{th HOT}$ between **TEG** and cold/hot sources, respectively.

In order to demonstrate the importance of the thermalization process, we have shown in Fig. 3 time dependence of the power production by a *TEG*. Whereas the initial peak reaches 500 μW , it suffices $\sim 25\text{s}$ to degrade the production down to $\sim 5\mu\text{W}$ due to thermalization. The idea is therefore to periodically disconnect the *TEG* from the hot source to let it cool down and then produce the next power peak by sticking the *TEG* to the heater. We will demonstrate that the integral of such power pulses may largely surpass the continuous power production. Of course, the question is how to produce such a pulse operation without using the *TEG* generated power.

We will now give an example of practical realization of the pulse mode, but we wish to emphasize that the realization of the mechanical motion is not in the scope of the paper that is rather dedicated to a demonstration of the fundamental idea of how to enhance Seebeck devices power production by a pulse mode of operation. The mechanical movement we propose here is no more than an example that can do the job and thus shows that the invention is feasible. On the other hand, this realization leads to mechanical and thermal shocks that could better be avoided. Therefore, we hope that the advantages of the pulse mode of operation will inspire researchers in other labs to propose better implementations.

A simple way to practically realize the pulse operation can be provided by the thermally bi-stable strip (*bimetal*) that was used in the heat-driven piezoelectric generators [93–98]. The difference is that in the present approach the thermoelectric generator replaces the piezoelectric one. The generating device is lifted/lowered over the heat source as illustrated in Fig. 4. As described in Refs. [93–98] the bimetal, bistable strip bends over periodically towards the opposite source with sub-Hz frequencies. In other words, when it touches the hot source during a few seconds, it will bend over and touch the cold source. Then after a few seconds of touching cold source, it will bend over again to touch the hot source, and so on. As schematically shown in Fig. 4, this periodic motion may be used to displace the *TEG*. This is only an example and we wish to emphasize that the realization of the mechanical motion is not in the scope of the paper. We are convinced that many alternative ways to accomplish such a periodic movement of a *TEG* exist. It is only a question of a smart engineering. Therefore, in this paper we are focusing only on demonstration of the more fundamental thesis that with such a periodic, or pulse, mode of operation the produced power is much larger than in a continuous mode. In the following section we present measurement setup and procedures that will be used to demonstrate the validity of the idea.

3. Measurement setup and procedure

The measurement scheme is presented in Fig. 5. Let's note that it

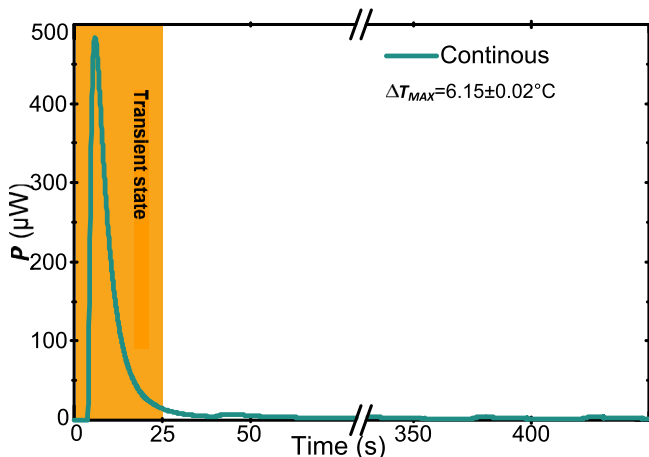


Fig. 3. *TEG* output power versus time in the continuous mode operation.

does not employ the bi-metal strip described above, since for the sake of reliable demonstration of the idea itself, we preferred to separate the proof from the implementation. The experimental benchmarking of the idea was realized upon commercialized *TEG* (model TG12-4 [99]) in the clean-room (class 100 ISO 5 cleanliness) using Sawatec HP-200 hot plate as a heat source and a load resistor $R_{Load} = 1\Omega$ for all investigated cases. As an acquisition device, a digital oscilloscope DSOX2024A was used. Clean-room environment for this experiments gave access to the: (i) high-stability heat source, normally used for lithographic resist bake, allowing simple implementation of *TEG* cyclic movements, (ii) equal *TEG*-to-hot plate feed force owing to the soaking system and (iii) ultra-stable and well monitored temperature ($T_{ambient}$) and humidity (RH) during experiments ($T_{ambient} = 21.77 \pm 0.09^\circ\text{C}$; $RH = 48.74 \pm 3.48\%$).

During the measurements, the *TEG* output voltage is measured. Load resistance of $R_{Load} = 1\Omega$ was used for all acquisitions. Selection of R_{Load} value is not random, we wanted to provide the characterization far from load matched condition to check if impulse *TEG* operation improves performance even in the disadvantageous conditions.

In order to deliver fair and accurate comparison between conventional and pulse operation a statistical measurement (with a population of at least four runs) for each case was done. Knowing that in the real-life situation *TEGs* operate for years without being serviced, the acquisitions were executed over very long time (minimal acquisition time 200s) which was preceded by at least 5 min of preliminary *TEG* operation to insure the steady-state conditions.

To give a broad performance evaluation, *TEG* was measured under six different operating conditions varying heating (t_H) and cooling ($t_C = t_{C1} + t_{C2}$) duration. This analysis is done at five different $T_{HOT} = \{25; 28; 32; 37; 72\}^\circ\text{C}$. Knowing the average $T_{ambient}$ during the measurement, it is possible to calculate the maximal temperature drop (temperature difference between reservoirs) over the *TEG* $\Delta T_{MAX} = \{3.1 \pm 0.01; 6.15 \pm 0.02; 10.1 \pm 0.026; 15.25 \pm 0.04; 50.29 \pm 0.008\}^\circ\text{C}$, respectively. It is worth to note that this characterization was performed for the temperatures that are of high interest for *IoT* devices since *IoT* nodes are usually exposed to similar conditions.

4. Results and discussion

As shown in Fig. 5 the measured signal is the *TEG* output voltage. The output power (P) is retrieved knowing R_{Load} following formula $P = V^2 / R_{Load}$.

Fig. 6 compares the *TEG* output power for continuous and pulse ($t_H = 15\text{ s}$ $t_C = 25\text{ s}$) operation for $T_{HOT} = 28^\circ\text{C}$. Fig. 6a shows the harvested output power in a logarithmic scale and indicates pics (that exceed the continuous power by at least one decade) that appear shortly after bringing the *TEG* into contact with the hot reservoir. This is caused by the fact that at the beginning of the measurement the temperature of the entire *TEG* volume equals $T_{ambient}$. Therefore, it can be noted that the power peaks refer to charging *TEG* heat capacitance by the heat source. Focusing on the continuous operation (see Fig. 6b), a few observations can be made. First of all, pulse operation produces power peaks with a large amplitude several times higher than the continuous mode power. Despite the fact that P gradually drops to zero when *TEG* is lifted, the average power is higher than in the continuous mode, if only the disconnection does not last for too long (see summary in Fig. 7). In other words, the output power P is dominated by the short generation periods when *TEG* is heated, if only they are sufficiently dense. Focusing on the pulse power transient, four consecutive stages can be distinguished. Firstly, (stage 1 in Fig. 6b), when *TEG* is heated, its heat capacitance charging is observed leading to abrupt P increase. Subsequently (stage 2), rapid P drop occurs despite that *TEG* is being heated, this corresponds to the thermalization process (cold side warming). Subsequently, stage 3 begins when *TEG* is being disconnected from the hot source. Despite absence of supply with heat, *TEG* still delivers some power, this can be explained by discharging the *TEG*'s heat capacitance.

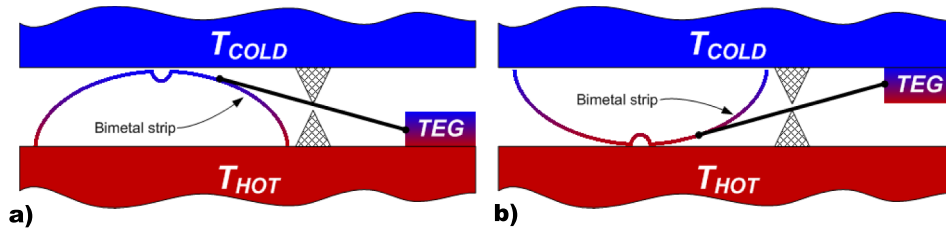


Fig. 4. The idea of TEG pulse movement realization without consuming TEG output power; a) bimetal strip in up position; b) bimetal strip in down position.

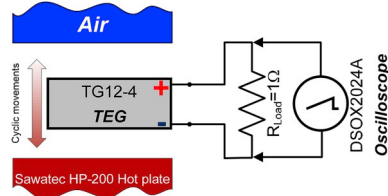


Fig. 5. Measurement setup of pulse fed thermoelectric generator.

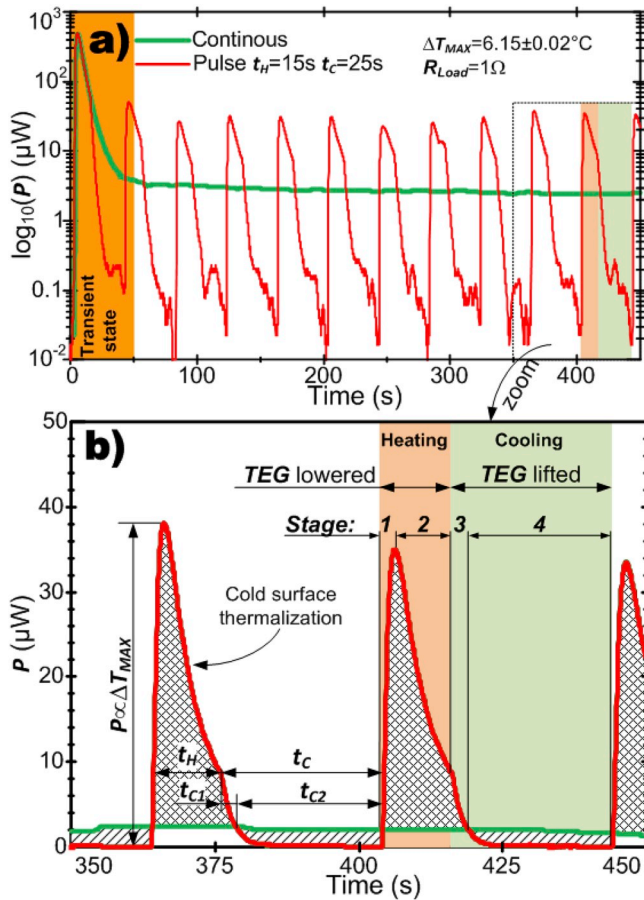


Fig. 6. TEG output power for continuous and pulse ($t_H = 15$ s $t_C = 25$ s) operation for $T_{HOT} = 28^\circ\text{C}$; a) pulse and continuous operation in a logarithmic scale; b) zooming on continuous operation emphasizing different stages in pulse operation and highlighting the energies where pulse outperforms continuous (orange shaded area) and vice versa (green shaded area).

Stage 3 ends when power from pulsed operation crosses continuous mode power. The duration of **stage 3** is marked as t_{C1} in Fig. 6b. Afterwards, the **stage 4** starts, this is a period of cooling when the generator tends to complete heat discharge, delivering merely residual power,

much smaller than that in the continuous mode. **Stage 4** lasts for t_{C2} (see Fig. 6b). After time $t_C = t_{C1} + t_{C2}$ the whole process starts again. In terms of optimization it could seem that t_{C2} should be as short as possible since only residual power is generated there. In fact, a minimal duration of **stage 4** is important for attaining by the TEG a thermal equilibrium with ambient. Otherwise, the next power peak may be reduced. On the other hand, if t_{C2} is too long, the gain with pulse operation may be compromised. Therefore, knowing that t_C is significantly influencing on the average harvested power, let's now determine t_C boundary values. Firstly, t_{C2} should be at least larger than zero (or $t_C > t_{C1}$). Typical value of t_{C1} counts in a few seconds. Secondly, the duration (t_{C2}) of cooling **stage 4** should not exceed t_{C2MAX} , where t_{C2MAX} is the time needed for the continuous production to equalize the energy of the peak. In order to determine t_{C2MAX} the energy of the pulse (surface denoted as orange shaded area in Fig. 6b) has to be set equal to the energy delivered when TEG is continually heated (surface denoted as green shaded area in Fig. 6b). The time when both energies are equal defines t_{C2MAX} . For the studied cases t_{C2MAX} ranges from almost 40sec to above 100sec. Summarizing, we have to fulfill the following conditions in order to ensure higher power production with the pulse mode, compared with the continuous mode: $t_{C1} < t_C < (t_{C1} + t_{C2MAX})$. As t_{C1} is in the order of a second and t_{C2MAX} in the order of many dozens of seconds, this condition is very easy to satisfy.

As it was described in the previous section, sets of measurements varying heating and cooling durations as well as T_{HOT} were carried out in order to deliver wide perspective on the proposed innovative TEG operation. Fig. 7 summarizes average output powers for all measurements.

Fig. 7 illustrates substantial outperformance of pulse supplied TEG over conventional continuous operation. This method can significantly improve the TEG performance over continuous mode. Depending on the values of t_C , t_H and T_{HOT} the improvement over the continuous operation ranges from X1.28 to X2.7! The highest power gain is observed for very short heating periods ($t_H = 5$ s, $t_C = 25$ s), meaning that the optimal P production is achieved when the TEG's cold surface thermalization (**stage 2** in Fig. 6b) is completely eliminated or as short as possible, meaning as short as possible t_H times. That is understandable since stage 2 leads to charging of the TEG's volume with heat that cancels energy production and is difficult to be extracted.

Pulse operated TEG is exposed to alternative work conditions regarding mechanical and electrical stresses. The electrical fields that may occur while rapidly forcing diffusive thermally induced movement of carriers from hot towards cold regions are far below the critical value at which carrier multiplication can occur. Focusing on the mechanical shocks arising from periodical impacts of TEG with the hot source while heating, it is justified to say that such movements should not damage mechanically the system. This conviction is based on the fact that semiconductor devices often work in vibrating or other mechanically harsh conditions without damage for long years. However, in the long-term use (going up to several decades) fatigue cracks can occur, therefore further study on TEG "soft landing" on heat source should be carried out to increase the system robustness. Regarding varying electrical carriers' flows incited by the pulse mode, it must be underlined that electronic devices are certified to withstand much more extreme variations in

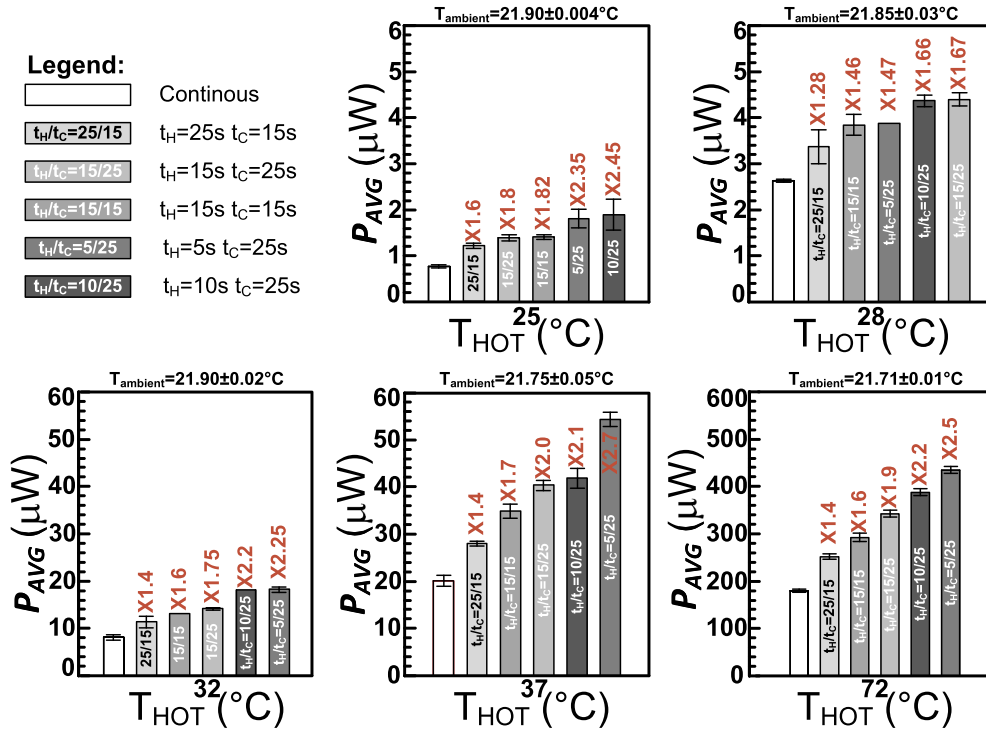


Fig. 7. Statistical summary of the average output power for different operating conditions. Labels above the bars correspond to the improvement ratio over the continuous mode.

carriers flows, comparing to the studied ones. In spite of much larger electric fields and/or mechanical stresses, modern semiconductor devices are certified for at least 10–20 years, of lifetime.

It has also to be underlined that in the case of very high ΔT , the pulse operation may lead to destructive thermal shocks. Abrupt *TEG* connection with hot source with very high T_{HOT} may release thermally induced expansion/compression forces that may lead to fatigue cracks formation significantly limiting the system lifetime. This needs a further study and optimization if considering high temperature applications”.

5. Suitability of the idea to IoT

Wireless Sensor Networks (*WSN*) are the material realization of the *IoT* idea, and are among the most natural applications of energy harvesting [100]. The general hardware architecture of a *WSN* node can be divided into four subsystems [101,102]: (i) communication for wireless data transmission, (ii) computing for data processing and managing, (iii) sensing for acquiring data and (iv) power for providing and regulating power supply voltage.

Power subsystems of *WSN* nodes consist of three elements: energy harvester, power management unit and energy storage [102]. The power provided by the energy harvester and efficiency of the power management unit determine the duty cycle of a *WSN* node, i.e. the proportion of time the node is sensing data, performs data processing and radio activity to the time it spends in a low power mode. Any increase in power production leads to greater autonomy of a *WSN* node and enables higher frequency of sensing events.

As part of the *PRIME* project (Ultra-Low Power Technologies and Memory Architectures for *IoT*) we developed hardware and firmware architecture of an ultra-low power *WSN* node with embedded sensors, which could be powered from a thermoelectric generator. Average power consumption of those nodes varies with duty cycle, which is a function of the energy supply from one hand and wireless network parameters from the other. Well-designed wireless node should spend about 99% of the time in sleep mode [102]. During inactivity period, the node consumes μA of current. When activated supply current rises to

tens of mA.

In this paper, we present a solution how to increase the efficiency of the power subsystem that would lead to greater autonomy of the *WSN* nodes, while keeping unchanged the requirements regarding temperature gradient necessary to proper work of a thermoelectric generator used for thermal energy harvesting.

6. Conclusions

In this communication we have reported on a novel approach to significantly boost thermoelectric generators performance. Novelty of this work consists in pulse mode of operation of the *ThermoElectric Generator (TEG)* realized by periodic connection/disconnection of the generator with the heat source. Additionally, the proposed boosting method can be miniaturized and allows integration with *IoT* nodes. We report up to X2.7 increase in average power over conventional continuous operation. This improvement has been observed with very low temperature differences across the generator therefore being of major interest for *IoT* devices.

Traditionally, progress in the thermoelectricity is realized rather at topological or material engineering level. This approach opens a new improvement trend which optimizes *TEG* operating conditions rather than the generator itself.

IoT market expansion is significantly slowed down by the lack of cheap and reliable alternatives for battery/wire supply. This approach can unlock further *IoT* expansion enabling reliable and miniaturizable energy harvesting booster which can be implemented using commercialized and easily available *TEGs*.

Authors involvement description

TS invented and patented the idea of pulse thermoelectric generator harvesting booster. *MH* along with *TS* wrote this communication. *MH* performed the measurements and retrieved the data. *MM* wrote the section about the Wireless Sensors Network. *SM* along with *TS* published and invented the bistable strip operation and the thermally-driven

piezoelectric generator.

Acknowledgement

The research leading to that communication has received funding from the Electronic Component Systems for European Leadership Joint Undertaking under grant agreement No. 692519 in the frame of the “Ultra-Low Power technologies and MEMory architectures for IoT” (PRIME) project.

References

- [1] Q.F. Hassan, A. ur R. Khan, S.A. Madani, *Internet of Things: Challenges, Advances, and Applications*, CRC Press, 2017.
- [2] G. Press, *Internet of Things by the Numbers: Market Estimates and Forecasts*, Forbes, 2014. <http://www.forbes.com/sites/gilpress/2014/08/22/internet-of-things-by-the-numbers-market-estimates-and-forecasts/> (accessed June 7, 2017).
- [3] United Nations, Department of Economic and Social Affairs, Population Division, *World Population Prospects*, United Nations, 2015. <https://esa.un.org/unpd/wpp/Download/Standard/Population/>.
- [4] F. Schwierz, Graphene transistors, *Nat. Nanotechnol.* 5 (2010) 487–496, <https://doi.org/10.1038/nnano.2010.89>.
- [5] International roadmap for devices and systems (IRDSTM), more moore - table MM01 logic core device technology roadmap. https://irds.ieee.org/images/files/pdf/2017/2017IRDS_MM.pdf, 2018.
- [6] International Technology Roadmap for Semiconductors (ITRS), More moore - table MM01 logic core device technology roadmap. https://irds.ieee.org/images/files/pdf/2017/2017IRDS_MM.pdf, 2016.
- [7] G. Frantz, Digital signal processor trends, *IEEE Micro* 20 (2000) 52–59, <https://doi.org/10.1109/40.888703>.
- [8] M.A. Richards, G.A. Shaw, Chips, architectures and algorithms: reflections on the exponential growth of digital signal processing capability. http://mrichards.ece.gatech.edu/wp-content/uploads/sites/462/2016/08/RichardsShaw_Algorithms_01204.pdf, 2004.
- [9] T. Skotnicki, Energy harvesting for IoT. <http://www.vlsisymposium.org/Past/15web/technology.html>, 2015.
- [10] A. Holst, Global PC Sales 2009–2019, Statista, 2019. <https://www.statista.com/statistics/263393/global-pc-sales-since-1st-quarter-2009-by-vendor/>. (Accessed 13 July 2019).
- [11] Personal Computer, Wikipedia, 2019. https://en.wikipedia.org/w/index.php?title=Personal_computer&oldid=903656487. (Accessed 13 July 2019).
- [12] S. Safavi, Z. Shukur, R. Razali, Reviews on cybercrime affecting portable devices, *Procedia Technol.* 11 (2013) 650–657, <https://doi.org/10.1016/j.protcy.2013.12.241>.
- [13] Cisco, Internet of everything (IoE) connections counter. <https://newsroom.cisco.com/feature-content?articleId=1208342>, 2013.
- [14] D. Briand, E. Yeatman, S. Roundy (Eds.), *Micro Energy Harvesting*, 1st Edition, Wiley-VCH, Weinheim, 2015.
- [15] N. Bizon, N.M. Tatabaie, F. Blaabjerg, E. Kurt (Eds.), *Energy Harvesting and Energy Efficiency: Technology, Methods, and Applications*, Springer International Publishing, 2017.
- [16] S. Yoon, S. Tak, J. Kim, Y. Jun, K. Kang, J. Park, Application of transparent dye-sensitized solar cells to building integrated photovoltaic systems, *Build. Environ.* 46 (2011) 1899–1904, <https://doi.org/10.1016/j.buildenv.2011.03.010>.
- [17] M. Saifullah, J. Gwak, J.H. Yun, Comprehensive review on material requirements, present status, and future prospects for building-integrated semitransparent photovoltaics (BISTPV), *J. Mater. Chem. A* 4 (2016) 8512–8540, <https://doi.org/10.1039/C6TA01016D>.
- [18] J. Bito, R. Bahr, J.G. Hester, S.A. Nauroze, A. Georgiadis, M.M. Tentzeris, A novel solar and electromagnetic energy harvesting system with a 3-D printed package for energy efficient internet-of-things wireless sensors, *IEEE Trans. Microw. Theory Tech.* 65 (2017) 1831–1842, <https://doi.org/10.1109/TMTT.2017.2660487>.
- [19] J.W. Matiko, N.J. Grabham, S.P. Beeby, M.J. Tudor, Review of the application of energy harvesting in buildings, *Meas. Sci. Technol.* 25 (2014), 012002, <https://doi.org/10.1088/0957-0233/25/1/012002>.
- [20] H. Zhang, Y. Yang, X. Zhong, Y. Su, Y. Zhou, C. Hu, Z.L. Wang, Single-electrode-based rotating triboelectric nanogenerator for harvesting energy from tires, *ACS Nano* 8 (2014) 680–689, <https://doi.org/10.1021/nn4053292>.
- [21] S. Wang, X. Mu, X. Wang, A.Y. Gu, Z.L. Wang, Y. Yang, Elastoelectroaerodynamics-driven triboelectric nanogenerator for scavenging air-flow energy, *ACS Nano* 9 (2015) 9554–9563, <https://doi.org/10.1021/acs.nano.5b04396>.
- [22] S. Wang, X. Wang, Z.L. Wang, Y. Yang, Efficient scavenging of solar and wind energies in a smart city, *ACS Nano* 10 (2016) 5696–5700, <https://doi.org/10.1021/acs.nano.6b02575>.
- [23] Y. Wu, X. Zhong, X. Wang, Y. Yang, Z.L. Wang, Hybrid energy cell for simultaneously harvesting wind, solar, and chemical energies, *Nano Res.* 7 (2014) 1631–1639, <https://doi.org/10.1007/s12274-014-0523-y>.
- [24] X. Wang, Z.L. Wang, Y. Yang, Hybridized nanogenerator for simultaneously scavenging mechanical and thermal energies by electromagnetic-triboelectric-thermoelectric effects, *Nano Energy* 26 (2016) 164–171, <https://doi.org/10.1016/j.nanoen.2016.05.032>.
- [25] Y. Yang, Z.L. Wang, Hybrid energy cells for simultaneously harvesting multi-types of energies, *Nano Energy* 14 (2015) 245–256, <https://doi.org/10.1016/j.nanoen.2014.11.058>.
- [26] K. Zhang, S. Wang, Y. Yang, A one-structure-based piezo-tribo-pyro-photoelectric effects coupled nanogenerator for simultaneously scavenging mechanical, thermal, and solar energies, *Adv. Energy Mater.* 7 (2017) 1601852, <https://doi.org/10.1002/aenm.201601852>.
- [27] S. Sherrit, H.J. Lee, P. Walkemeyer, T. Winn, L.P. Tosi, T. Colonius, Fluid flow nozzle energy harvesters, in: *Sensors and Smart Structures Technologies for Civil, Mechanical, and Aerospace Systems 2015*, International Society for Optics and Photonics, 2015, p. 943507, <https://doi.org/10.1117/12.2084574>.
- [28] H. Lee, S. Sherrit, L. Tosi, P. Walkemeyer, T. Colonius, Piezoelectric energy harvesting in internal fluid flow, *Sensors* 15 (2015) 26039–26062, <https://doi.org/10.3390/s151026039>.
- [29] D.A. Howey, A. Bansal, A.S. Holmes, Design and performance of a centimetre-scale shrouded wind turbine for energy harvesting, *Smart Mater. Struct.* 20 (2011), 085021, <https://doi.org/10.1088/0964-1726/20/8/085021>.
- [30] A.S. Holmes, G. Hong, K.R. Pullen, K.R. Buffard, Axial-flow microturbine with electromagnetic generator: design, CFD simulation, and prototype demonstration, in: *17th IEEE International Conference on Micro Electro Mechanical Systems*, 2004 (MEMS), 2004, pp. 568–571, <https://doi.org/10.1109/MEMS.2004.1290648>.
- [31] H.J. Visser, A.C.F. Reniers, J.A.C. Theeuwes, Ambient RF energy scavenging: GSM and WLAN power density measurements, in: *38th European Microwave Conference EuMC 2008*, 2008, pp. 721–724, <https://doi.org/10.1109/EuMC.2008.4751554>.
- [32] S. Duangsuan, T. Leukachorn, S. Chinsawatpan, S. Promwong, Experimental study for polarimetric measurement of RFID transfer function with in an indoor environment, in: *2009 IEEE 9th Malaysia International Conference on Communications (MICC)*, 2009, pp. 686–690, <https://doi.org/10.1109/MICC.2009.5431410>.
- [33] F. Cheng, Y. Hong, W. Li, X. Guo, H. Zhang, F. Fu, B. Feng, G. Wang, C. Wang, H. Qin, A thermoelectric generator for scavenging gas-heat: from module optimization to prototype test, *Energy* 121 (2017) 545–560, <https://doi.org/10.1016/j.energy.2017.01.025>.
- [34] A. Massaguer, E. Massaguer, M. Comamala, T. Pujol, J.R. González, M. D. Cardenas, D. Carbonell, A.J. Bueno, A method to assess the fuel economy of automotive thermoelectric generators, *Appl. Energy* 222 (2018) 42–58, <https://doi.org/10.1016/j.apenergy.2018.03.169>.
- [35] M. Haras, T. Skotnicki, Thermoelectricity for IoT – a review, *Nano Energy* 54 (2018) 461–476, <https://doi.org/10.1016/j.nanoen.2018.10.013>.
- [36] T.-M. Bah, S. Didenko, M. Haras, V. Lacatena, J.-F. Robillard, S. Monfray, T. Skotnicki, E. Dubois, Benefits of a Nano-Patterned Thin Silicon Film Based Thermoelectric Generator, 2017.
- [37] Y. Yang, Y. Zhou, J.M. Wu, Z.L. Wang, Single micro/nanowire pyroelectric nanogenerators as self-powered temperature sensors, *ACS Nano* 6 (2012) 8456–8461, <https://doi.org/10.1021/nn303414u>.
- [38] Y. Yang, S. Wang, Y. Zhang, Z.L. Wang, Pyroelectric nanogenerators for driving wireless sensors, *Nano Lett.* 12 (2012) 6408–6413, <https://doi.org/10.1021/nl303755m>.
- [39] Y. Yang, W. Guo, K.C. Pradel, G. Zhu, Y. Zhou, Y. Zhang, Y. Hu, L. Lin, Z.L. Wang, Pyroelectric nanogenerators for harvesting thermoelectric energy, *Nano Lett.* 12 (2012) 2833–2838, <https://doi.org/10.1021/nl3003039>.
- [40] Y. Yang, J.H. Jung, B.K. Yun, F. Zhang, K.C. Pradel, W. Guo, Z.L. Wang, Flexible pyroelectric nanogenerators using a composite structure of lead-free K₂FeO₄ nanowires, *Adv. Mater.* 24 (2012) 5357–5362, <https://doi.org/10.1002/adma.201201414>.
- [41] L. Jin, J. Chen, B. Zhang, W. Deng, L. Zhang, H. Zhang, X. Huang, M. Zhu, W. Yang, Z.L. Wang, Self-powered safety helmet based on hybridized nanogenerator for emergency, *ACS Nano* 10 (2016) 7874–7881, <https://doi.org/10.1021/acs.nano.6b03760>.
- [42] R.K. Gupta, Q. Shi, L. Dhakar, T. Wang, C.H. Heng, C. Lee, Broadband energy harvester using non-linear polymer spring and electromagnetic/triboelectric hybrid mechanism, *Sci. Rep.* 7 (2017) 41396, <https://doi.org/10.1038/srep41396>.
- [43] B. Zhang, J. Chen, L. Jin, W. Deng, L. Zhang, H. Zhang, M. Zhu, W. Yang, Z. L. Wang, Rotating-disk-based hybridized electromagnetic-triboelectric nanogenerator for sustainably powering wireless traffic volume sensors, *ACS Nano* 10 (2016) 6241–6247, <https://doi.org/10.1021/acs.nano.6b02384>.
- [44] M. Salauddin, R.M. Toyabur, P. Maharjan, J.Y. Park, High performance human-induced vibration driven hybrid energy harvester for powering portable electronics, *Nano Energy* 45 (2018) 236–246, <https://doi.org/10.1016/j.nanoen.2017.12.046>.
- [45] J. Zhu, Y. Zhu, X. Wang, A hybrid piezoelectric and triboelectric nanogenerator with PVDF nanoparticles and leaf-shaped microstructure PTFE film for scavenging mechanical energy, *Adv. Mater. Interfaces* 5 (2018), 1700750, <https://doi.org/10.1002/admi.201700750>.
- [46] M. Salauddin, H. Cho, J.Y. Park, A hybrid electromagnetic-triboelectric energy harvester using a dual half-bach magnet array powered by human-body-induced motion, *Adv. Mater. Technol.* 3 (2018) 1700240, <https://doi.org/10.1002/admt.201700240>.
- [47] Z.L. Wang, Triboelectric nanogenerators as new energy technology for self-powered systems and as active mechanical and chemical sensors, *ACS Nano* 7 (2013) 9533–9557, <https://doi.org/10.1021/nn404614z>.

- [48] E. Velme, Thomas Johann Seebeck and his contribution to the modern science and technology, in: 12th Biennial Baltic Electronics Conference (BEC), 2010, pp. 17–24, <https://doi.org/10.1109/BEC.2010.5631216>, 2010.
- [49] D.M. Rowe, Applications of nuclear-powered thermoelectric generators in space, *Appl. Energy* 40 (1991) 241–271, [https://doi.org/10.1016/0306-2619\(91\)90020-X](https://doi.org/10.1016/0306-2619(91)90020-X).
- [50] L. Francioso, C. De Pascali, I. Farella, C. Martucci, P. Creti, P. Siciliano, A. Perrone, Flexible thermoelectric generator for ambient assisted living wearable biometric sensors, *J. Power Sources* 196 (2011) 3239–3243, <https://doi.org/10.1016/j.jpowsour.2010.11.081>.
- [51] K.J. Heilman, S.W. Porges, Accuracy of the LifeShift® (Vivometrics) in the detection of cardiac rhythms, *Biol. Psychol.* 75 (2007) 300–305, <https://doi.org/10.1016/j.biopsycho.2007.04.001>.
- [52] V. Parsonnet, J. Driller, D. Cook, S.A. Rizvi, Thirty-one years of clinical experience with “Nuclear-Powered” pacemakers, *Pacing Clin. Electrophysiol.* 29 (2006) 195–200, <https://doi.org/10.1111/j.1540-8159.2006.00317.x>.
- [53] V. Leonov, P. Fiorini, T. Torfs, R.J.M. Vullers, C. Van Hoof, Thermal matching of a thermoelectric energy harvester with the environment and its application in wearable self-powered wireless medical sensors, in: 15th International Workshop on Thermal Investigations of ICs and Systems, THERMINIC 2009, 2009, pp. 95–100.
- [54] V. Leonov, T. Torfs, P. Fiorini, C. Van Hoof, Thermoelectric converters of human warmth for self-powered wireless sensor nodes, *IEEE Sens. J.* 7 (2007) 650–657, <https://doi.org/10.1109/JSEN.2007.894917>.
- [55] J. Liebl, S. Neugebauer, A. Eder, M. Linde, B. Mazar, W. Stütz, The thermoelectric generator from BMW is making use of waste heat, *MTZ Worldw.* 70 (2009) 4–11, <https://doi.org/10.1007/BF03226939>.
- [56] B. Silke, Looking for the Next Gram. BMW Efficient Dynamics Means Ongoing Research. Exhaust Heat Offers the Greatest Potential for the Future, BMW Group, 2011. <https://www.press.bmwgroup.com/global/article/detail/T0119738EN/looking-for-the-next-gram?language=en> (accessed March 11, 2018).
- [57] B. Orr, A. Akbarzadeh, M. Mochizuki, R. Singh, A review of car waste heat recovery systems utilising thermoelectric generators and heat pipes, *Appl. Therm. Eng.* 101 (2016) 490–495, <https://doi.org/10.1016/j.applthermaleng.2015.10.081>.
- [58] P. Nenner, U. Marco, Harvest time, *ABB Rev.* 1 (2011) 47–51.
- [59] G. Min, D.M. Rowe, Cooling performance of integrated thermoelectric microcooler, *Solid State Electron.* 43 (1999) 923–929, [https://doi.org/10.1016/S0038-1101\(99\)00045-3](https://doi.org/10.1016/S0038-1101(99)00045-3).
- [60] D.M. Rowe, Thermoelectric power generation, *Proc. IEEE* 125 (1978) 1113–1136, <https://doi.org/10.1049/piee.1978.0247>.
- [61] A. Majumdar, Thermoelectricity in semiconductor nanostructures, *Science* 303 (2004) 777–778, <https://doi.org/10.1126/science.1093164>.
- [62] A.T. Duong, V.Q. Nguyen, G. Duvjir, V.T. Duong, S. Kwon, J.Y. Song, J.K. Lee, J. E. Lee, S. Park, T. Min, J. Lee, J. Kim, S. Cho, Achieving ZT=2.2 with Bi-doped n-type SnSe single crystals, *Nat. Commun.* 7 (2016) 13713, <https://doi.org/10.1038/ncomms13713>.
- [63] L.-D. Zhao, S.-H. Lo, Y. Zhang, H. Sun, G. Tan, C. Uher, C. Wolverton, V.P. Dravid, M.G. Kanatzidis, Ultralow thermal conductivity and high thermoelectric figure of merit in SnSe crystals, *Nature* 508 (2014) 373–377, <https://doi.org/10.1038/nature13184>.
- [64] T.M. Tritt, H. Böttner, L. Chen, Thermoelectrics: direct solar thermal energy conversion, *MRS Bull.* 33 (2008) 366–368, <https://doi.org/10.1557/mrs2008.73>.
- [65] J. Nurnus, H. Böttner, A. Lambrecht, Thermoelectric micro devices: interplay of highly effective thin film materials and technological compatibility, in: 22nd International Conference on Thermoelectrics - ICT, 2003, 2003, pp. 655–660, <https://doi.org/10.1109/ICT.2003.1287598>, La Grande Motte, France.
- [66] M. Haras, V. Lacatena, S. Monfray, J.-F. Robillard, T. Skotnicki, E. Dubois, Unconventional thin-film thermoelectric converters: structure, simulation, and comparative study, *J. Electron. Mater.* 43 (2014) 2109–2114, <https://doi.org/10.1007/s11664-014-2982-z>.
- [67] J.P. Carmo, L.M. Gonçalves, J.H. Correia, Micro and Nanodevices for thermoelectric converters, in: B. Bhushan (Ed.), *Scanning Probe Microscopy in Nanoscience and Nanotechnology*, Springer, Heidelberg, 2010, pp. 791–811. <http://public.eblib.com/EBLPublic/PublicView.do?ptid=666889>. (Accessed 24 October 2013).
- [68] L.M. Gonçalves, J.G. Rocha, C. Couto, P. Alpuim, G. Min, D.M. Rowe, J. H. Correia, Fabrication of flexible thermoelectric microcoolers using planar thin-film technologies, *J. Microelectr. Microeng.* 17 (2007) 168–173, <https://doi.org/10.1088/0960-1317/17/7/S14>.
- [69] A. Chen, D. Madan, P.K. Wright, J.W. Evans, Dispenser-printed planar thick-film thermoelectric energy generators, *J. Microelectr. Microeng.* 21 (2011) 104006, <https://doi.org/10.1088/0960-1317/21/10/104006>.
- [70] M. Haras, V. Lacatena, F. Morini, J.-F. Robillard, S. Monfray, T. Skotnicki, E. Dubois, Thermoelectric energy conversion: how good can silicon be? *Mater. Lett.* 157 (2015) 193–196, <https://doi.org/10.1016/j.matlet.2015.05.012>.
- [71] M. Haras, V. Lacatena, T.M. Bah, S. Didenko, J.F. Robillard, S. Monfray, T. Skotnicki, E. Dubois, Fabrication of thin-film silicon membranes with phononic crystals for thermal conductivity measurements, *IEEE Electron. Device Lett.* 37 (2016) 1358–1361, <https://doi.org/10.1109/LED.2016.2600590>.
- [72] G. Span, M. Wagner, S. Holzer, T. Grasser, Thermoelectric power conversion using generation of electron-hole pairs in large area pn junctions, in: The 25th International Conference on Thermoelectrics, IEEE, Vienna, Austria, 2006, pp. 23–28, <https://doi.org/10.1109/ICT.2006.331261>.
- [73] G. Span, M. Wagner, T. Grasser, L. Holmgren, Miniaturized TEG with thermal generation of free carriers, *Phys. Status Solidi Rapid Res. Lett.* 1 (2007) 241–243, <https://doi.org/10.1002/psrr.200700171>.
- [74] R. Chavez, A. Becker, V. Kessler, M. Engenhorst, N. Petermann, H. Wiggers, G. Schierning, R. Schmechel, A new thermoelectric concept using large area PN junctions, *MRS Proc.* 1543 (2013) 3–8, <https://doi.org/10.1557/opl.2013.954>.
- [75] R. Chavez, S. Angst, J. Hall, J. Stoetzel, V. Kessler, L. Bitzer, F. Maculewicz, N. Benson, H. Wiggers, D. Wolf, G. Schierning, R. Schmechel, High temperature thermoelectric device concept using large area <Emphasis Type="Italic">PN</Emphasis> junctions, *J. Electron. Mater.* 43 (2014) 2376–2383, <https://doi.org/10.1007/s11664-014-3073-x>.
- [76] M. Wagner, G. Span, S. Holzer, O. Triebel, T. Grasser, V. Palankovski, Power Output Improvement of Silicon-Germanium Thermoelectric Generators, 2006, pp. 1151–1162, <https://doi.org/10.1149/1.2355909>, Cancun, Mexico.
- [77] D. Zhang, K. Zhang, Y. Wang, Y. Wang, Y. Yang, Thermoelectric effect induced electricity in stretchable graphene-polymer nanocomposites for ultrasensitive self-powered strain sensor system, *Nano Energy* 56 (2019) 25–32, <https://doi.org/10.1016/j.nanoen.2018.11.026>.
- [78] Y. Yang, Z.-H. Lin, T. Hou, F. Zhang, Z.L. Wang, Nanowire-composite based flexible thermoelectric nanogenerators and self-powered temperature sensors, *Nano Res.* 5 (2012) 888–895, <https://doi.org/10.1007/s12274-012-0272-8>.
- [79] H.J. Goldsmid, *Conversion efficiency and figure-of-merit*, in: *CRC Handbook of Thermoelectrics*, CRC Press, Boca Raton, FL, 1995, pp. 19–26.
- [80] H.J. Goldsmid, *Introduction to Thermoelectricity*, second ed., Springer, Berlin Heidelberg, 2016.
- [81] J. Bierschenk, Optimized thermoelectrics for energy harvesting applications, in: Applications of Ferroelectrics, 2008. ISAF 2008. 17th IEEE International Symposium on the, 2008, pp. 1–4, <https://doi.org/10.1109/ISAF.2008.4693950>.
- [82] G.S. Nolas, *Thermoelectrics: Basic Principles and New Materials Developments*, Springer, Berlin; New York, 2001.
- [83] R.R. Heikes, R.W. Ure, *Thermoelectricity: Science and Engineering*, Interscience Publishers, New York, NY, 1961.
- [84] S. Lineykin, S. Ben-Yakov, SPICE compatible equivalent circuit of the energy conversion processes in thermoelectric modules, in: Proceedings of the 23rd IEEE Convention of Electrical and Electronics Engineers, Israel, 2004, pp. 346–349, <https://doi.org/10.1109/EEEL.2004.1361162>.
- [85] A.P. Perez-Marín, A.F. Lopeandía, L.I. Abad, P. Ferrando-Villaba, G. García, A. M. Lopez, F.X. Muñoz-Pascual, J. Rodríguez-Viejo, Micropower thermoelectric generator from thin Si membranes, *Nano Energy* 4 (2014) 73–80, <https://doi.org/10.1016/j.nanoen.2013.12.007>.
- [86] T.M. Tritt, M.A. Subramanian, Thermoelectric materials, phenomena, and applications: a bird's eye view, *MRS Bull.* 31 (2006) 188–198, <https://doi.org/10.1557/mrs2006.44>.
- [87] *Springer Handbook of Nanotechnology*, 2nd Rev. & Extended, Springer, Berlin; New York, 2007.
- [88] R. Stobart, Z. Yang, S. Lan, System design considerations for thermoelectric energy recovery, in: *Thermoelectric Materials and Devices*, Royal Society of Chemistry, Cambridge, 2017, pp. 156–203, <https://doi.org/10.1039/9781782624042-00156>.
- [89] H. Edwards, J. Debor, T. Tran, D. Freeman, K. Maggio, A theory of thermoelectric energy harvesting systems, in: *Innovative Materials and Systems for Energy Harvesting Applications*, IGI Global, Hershey, PA, USA, 2015, pp. 254–270, <https://doi.org/10.4018/978-1-4666-8254-2>.
- [90] M. Di Paolo Emilio, Powering microsystem, in: *Microelectronic Circuit Design for Energy Harvesting Systems*, Springer International Publishing, Cham, 2017, pp. 75–104, https://doi.org/10.1007/978-3-319-47587-5_8.
- [91] Micropelt GmbH, MPG D651-D751 Thin Film Thermo Generator Sensing Devices Product Datasheet, 2008.
- [92] V. Leonov, R.J.M. Vullers, Wearable electronics self-powered by using human body heat: the state of the art and the perspective, *J. Renew. Sustain. Energy.* 1 (2009) 062701, <https://doi.org/10.1063/1.3255465>.
- [93] T. Skotnicki, Thermo-mechano-electrical converter, US 9.461.564 B2, <http://www.freepatentsonline.com/9461564.html>, 2016. (Accessed 24 August 2017).
- [94] S. Boisseau, G. Despesse, S. Monfray, O. Puscasu, T. Skotnicki, Semi-flexible bimetal-based thermal energy harvesters, *Smart Mater. Struct.* 22 (2013), 025021, <https://doi.org/10.1088/0964-1726/22/2/025021>.
- [95] O. Puscasu, S. Monfray, J. Boughaleb, P.J. Cottinet, D. Rapisarda, E. Rouvière, G. Delepierre, G. Pitone, C. Maître, F. Boeuf, D. Guyomar, T. Skotnicki, Flexible bimetal and piezoelectric based thermal to electrical energy converters, *Sens. Actuators A Phys.* 214 (2014) 7–14, <https://doi.org/10.1016/j.sna.2014.03.027>.
- [96] O. Puscasu, S. Monfray, G. Savelli, C. Maître, J.P. Pemeant, P. Coronel, K. Domanski, P. Grabiec, P. Ancey, P.J. Cottinet, D. Guyomar, V. Bottarel, G. Ricotti, I. Bimbaud, F. Boeuf, F. Gaillard, T. Skotnicki, An innovative heat harvesting technology (HEATec) for above-Seebeck performance, in: 2012 International Electron Devices Meeting, IEEE, San Francisco, California, 2012, pp. 12.5.1–12.5.4, <https://doi.org/10.1109/IEDM.2012.6479031>.
- [97] S. Monfray, A. Arnaud, T. Skotnicki, O. Puscasu, S. Boisseau, Device for converting thermal power into electric power, US 9.698.707 B2, <http://www.google.com/patents/US9698707>, 2017. (Accessed 10 August 2017).
- [98] T. Skotnicki, O. Puscasu, S. Monfray, Device for Converting Thermal Energy into Electric Energy in the Presence of a Hot Source, 2013. US 2013/0292952 A1, <http://www.freepatentsonline.com/y2013/0292952.html>. (Accessed 9 August 2017).
- [99] II-VI Marlow Inc, Technical data sheet for TG12-4. [https://cdn2.hubspot.net/hubfs/547732/Data Sheets/TG12-4.pdf](https://cdn2.hubspot.net/hubfs/547732/Data%20Sheets/TG12-4.pdf), 2014.

- [100] P. Dziurdzia, Modeling and simulation of thermoelectric energy harvesting processes, in: Y.K. Tan (Ed.), Sustainable Energy Harvesting Technologies - Past, Present and Future, InTech, Rijeka, Croatia, 2011, pp. 109–128, <https://doi.org/10.5772/28530>.
- [101] V. Raghunathan, C. Schurgers, Sung Park, M.B. Srivastava, Energy-aware wireless microsensor networks, IEEE Signal Process. Mag. 19 (2002) 40–50, <https://doi.org/10.1109/79.985679>.
- [102] M. Kuorilehto, M. Kohvakka, J. Suhonen, P. Hämäläinen, M. Hännikäinen, T. D. Hamalainen, Ultra-Low Energy Wireless Sensor Networks in Practice Theory, Realization and Deployment, John Wiley & Sons, New York, NY, 2008. <http://nbn-resolving.de/urn:nbn:de:101:1-201412015791>. (Accessed 21 August 2019).



Stéphane MONFRAY is the Principal Scientist in the Silicon Technologies Department at STMicroelectronics in Crolles. He was involved in several European projects and led a national project on energy harvesting. He is the co-author of more than 137 publications in major conferences and journals, and of 53 patents. His expertise is on advanced CMOS, Energy Harvesting and IoT systems, and advanced Photonic devices for automotive (gyroscopes, sensors, LIDAR). He was the co-recipient of the Paul Rappaport Award in 2000, and was the co-recipient of the 2012 French Electronic Grand Prize “General Ferrié” for his work on thin film devices.



Maciej HARAS born in Gdańsk, Poland in 1984. M.Eng in power electronics at Gdańsk University of Technology and at Polytechnique de Grenoble (2008). Ph.D. in nanotechnology at Université Lille-1 (2016) for investigation of silicon-based thermoelectric generators, awarded with the best Ph.D. prize from Université Catholique de Lille. Joined STMicroelectronics R&D (2011) working on energy harvesting. In 2014 he joined IEMN and investigated CMOS compatible thermoelectric generators and silicon nanowires mechanical properties. Currently he is the principal scientist at CEZAMAT and the assistant professor at Institute of High Pressure Physics (UNIPRESS), Polish Academy of Sciences and at Warsaw University of Technology.



Thomas SKOTNICKI was with France Telecom (1985–99), afterwards he joined STMicroelectronics where he became the first Company Fellow and Technical Vice-President. He invented the UTBB FDSOI structure (in production at STMicroelectronics, GF and Samsung). His MASTAR models served ITRS editions 2005–2015. Today he's Professor at WUT, Warsaw. He holds 80 patents, has authored 400 publications and several book chapters. He's an IEEE Fellow, has supervised 32 PhDs, was on JJ Ebers and Frederik Philips IEEE Committees and on Committees of all big conferences in his field. He was Co-editor of IEEE TED and co-recipient of the Rappaport Award 2000.



Michał MARKIEWICZ received M.Sc. from Jagiellonian University in Cracow, Poland in 2006 and Dr.-Ing. from Bremen University, Bremen, Germany in 2015. He is assistant professor at Faculty of Mathematics and Computer Science, Jagiellonian University. His scientific interests cover: sensor networks, traffic management and power electronics.